


CBM31385AFB

1/2" High Sensitivity CMOS x31 Zoom/AF/NIR Camera Module

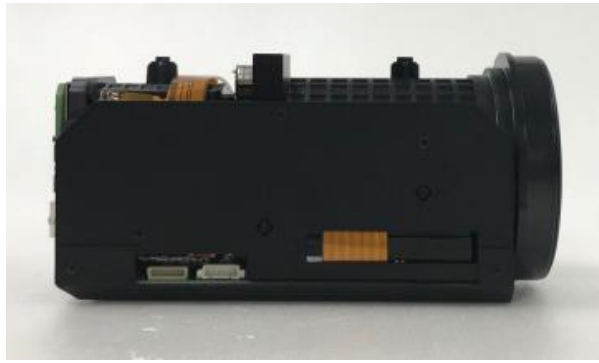

■ Overview

- 2M camera module equipped with SONY high-sensitivity color image sensor.
- Equipped with 1/1.8" 31x optical zoom lens for 2M.
- Equipped with a visible light cut filter as standard.

■ Feature

- Equipped with a high-sensitivity, low-noise sensor.
- Supports auto ICR operation, automatically switching from daytime color images to nighttime near-infrared images
- 31x optical zoom and 32x digital zoom for a total of 992x zoom.
- Equipped with auto iris, auto electronic shutter, auto gain, auto white balance, and auto focus.
- Equipped with various correction functions according to the image scene (DNR, WDR, fog, heat haze, etc.).
- Compatible with LVDS output, allowing easy connection to network modules.
- Supports 3G-SDI/HD-SDI output, enabling long-distance wiring up to 100m without image quality degradation.
- Supports 1080p, 1080i, 720p video formats.
- Flexible support for additional functions.


Global Chip Technology Corp.

2-9-4-6F, TSP BLDG-No.6.
Minami-cho, Chuo-ku, Chiba-Shi
Chiba-Ken, Japan 〒260-0842
TEL : +81-43-308-6300
FAX : +81-43-261-6100
E-mail : sales@gct-c.com

■ Specifications

Sensor	Image Sensor	1/2" SONY CMOS Image Sensor (IMX385LQR-C)
	Number of pixels	1952(H) x 1113(V), 2.17M Pixels
	Pixel Size	3.75 μ m(H) x 3.75 μ m(V)
	Scan Format	1920x1080@30fps, 1920x1080@25fps, 1920x1080@60fps, 1920x1080@50fps (Option 1920x1080@29.97fps, 1920x1080@59.94fps)
Lens	F No.	Wide: F1.36, Tele: F4.60
	Focal Length	Wide (x1) :6.91mm, Tele (x31) : 214.64mm
	Zoom	Optical Zoom 1~31times : Stepping Moter Digital Zoom 1~32 times : (Optical + Digital Zoom Max : 992 times)
	Focus	Stepping motor system auto focus Focus range : Wide 2.0m~∞, Tele 2.0m~∞
	Optical Arange of view	Wide (x1) : D/65.18° , H/57.36° , V/33.12° Tele (x31) : D/2.20° , H/1.92° , V/1.08°
	Optical Filter (Triple ICR)	1: IR Cut Filter (for Day Color) 2: NIR Filter 3: Through Glass
Video	Video Format	3G-SDI : 1080p60, 1080p50 (Option 1080p59.94) HD-SDI : 1080p30, 1080p25, 1080i60, 1080i50, 720p60, 720p50, 720p30, 720p25 (Option 1080p29.97, 1080i59.94, 720p59.94, 720p29.97) LVDS : 1080p30, 1080p25, 1080i60, 1080i50, 720p60, 720p50, 720p30, 720p25 (Option 1080p29.97, 1080i59.94, 720p59.94, 720p29.97) VBS : NTSC, PAL
	Minimum Illumination	F1.5, Color 0.01 lx, B/W 0.003 lx, IR Cut Filter Off, AGC 42dB, 25IRE
	Signal to Noise Ratio	STD 52dB (Minimum 48dB)
Function	Setting	OSD, UART(2ch)
	Auto Iris	Yes
	Auto Exposure	Yes
	Auto Focus	Yes
	White Balance	AUTO / ATW / AWB (One Push)
	Manual Shutter	1/30(25), 1/50, 1/60, 1/100, 1/120, 1/150, 1/180, 1/250, 1/350, 1/500, 1/750, 1/1000, 1/2000, 1/4000, 1/10000, 1/34000, 1/78000 sec.
	Sense Up	AGC Max 60dB & Slow Shutter Max 8 sec.
	Day & Night Mode	Color / B&W / Auto / External
	Digital Noise Reduction	2D + 3D (Coupled Motion ON/OFF)
	Backlight Control	Yes
	Peak / Average Control	Yes
	Gamma Control	0.45 ~ 1.00 (Auto Setup ON/OFF)
	Wide Dynamic Range	XDR, D-WDR, HDR
	Eclipse (High Light Clip)	Yes
	Fog Reduction	Yes
	Heat Haze Correction	Yes
	Motion Detection	Yes
	H/V Mirror, Flip	Yes
	OSD Language	English, Japanese (Customizable)
	General	Title Display
Communication Protocol		Original / Pelco-D / Pelco-P / VISCA
Privacy Mask		Yes (16 Masks)
Preset Position		Yes (64 Area)
Synchronous Mode		Internal
Power Source		DC+12V
Consumption Current		370mA (30fps)
Operation Temperature		-10°C ~ +50°C
Storage Temperature		-30°C ~ +70°C
Humidity		80% Max
Outside Dimensions		W63mm x H67mm x D141.74mm
Net Weight		450g

■ LVDS Format

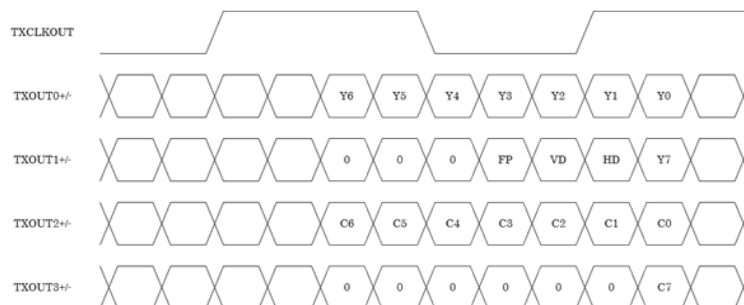

Global Chip Technology Corp.

2-9-4-6F, TSP BLDG-No.6,
Minami-cho, Chuo-ku, Chiba-Shi
Chiba-Ken, Japan 〒260-0842
TEL : +81-43-308-6300
FAX : +81-43-261-6100
E-mail : sales@gct-c.com

■ Pin Assignment

JP2 (53261-0671/MOLEX)		
1	DC12in	12V DC
2	GND	Power Ground
3	VBS	Analog Video
4	GND	Video Ground
5	IRext	ICR Control
6	VDO	Sensor VD Pulse

JP3 (SM06B-SRSS-TB/JST)		
1	ENTER	OSD Enter
2	RIGHT	OSD Right/Tele
3	LEFT	OSD Left/Wide
4	UP	OSD Up/Near
5	DOWN	OSD Down/Far
6	GND	Ground


JP4 (SM05B-SRSS-TB/JST)		
1	GND	Ground
2	TXD2	UART TX (3.3V)
3	RXD2	UART RX (3.3V)
4	DC33out	3.3V DC
5	RS485EN2	RS485 Enable (3.3V)

JP8 (AYU1-1P-02676-120/JST)		
1	TX-SDI	SDI TX
2	GND	Video Ground

JP11 (SM04B-SRSS-TB/JST)		
1	DC33out	3.3V DC
2	ARin	Audio R
3	ALin	Audio L
4	AGND	Ground

(Option)

■ Dimensions

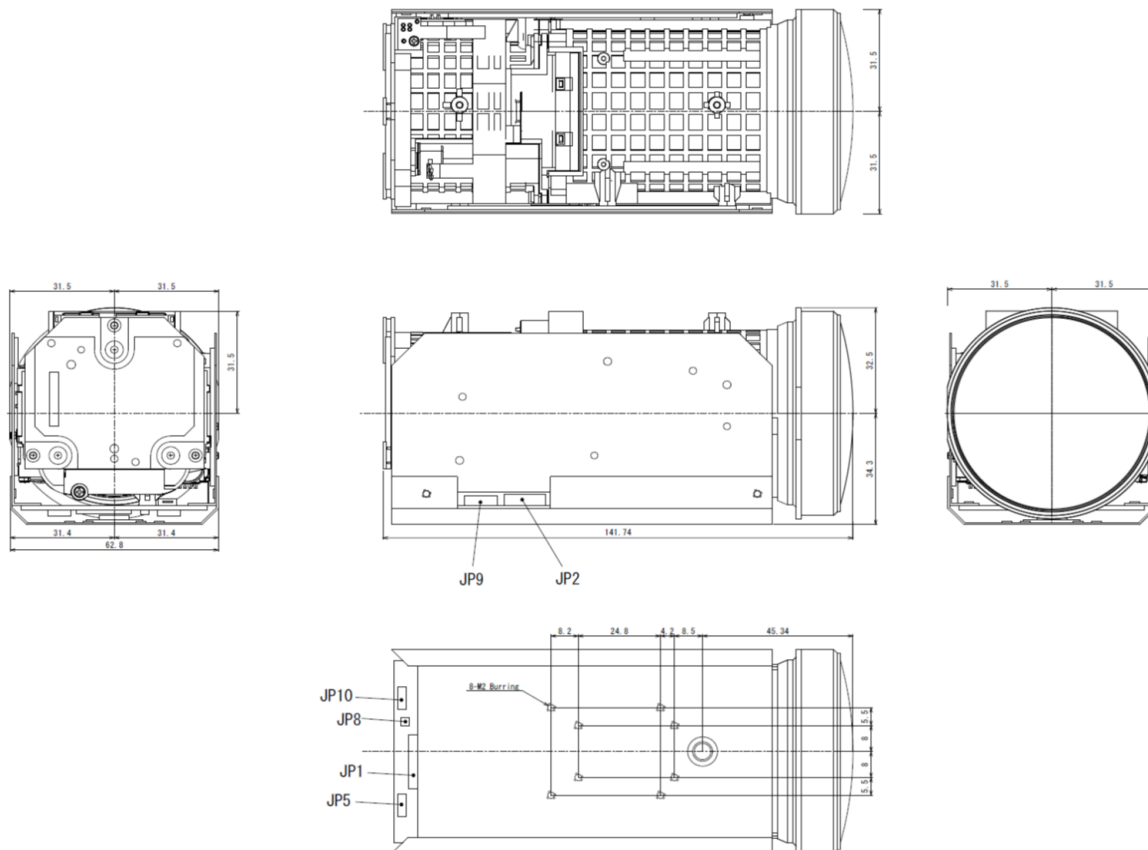

Global Chip Technology Corp.

2-9-4-6F, TSP BLDG-No.6
Minami-cho, Chuo-ku, Chiba-Shi
Chiba-Ken, Japan 〒260-0842
TEL : +81-43-308-6300
FAX : +81-43-261-6100
E-mail : sales@gct-c.com